

※ This document is a temporary specification which does not include whole information about the product.

※ This document is subject to be changed for approving product quality without notice.

SPECIFICATIONS	ITEM	LINE FILTER	Rev
	TNC SPEC NO	CH008090S	0

## 1. ELECTRICAL CHARACTERISTIC

NO	ITEM	TERMINAL	SPECIFICATION			REMARKS
1	RATED VOLTAGE	LINE TO LINE	AC 250V			
2	RATED CURRENT	START-FINISH	0.8A			
3	INDUCTANCE	START-FINISH	16KHz	9.0mH	+ 50%, -30%	HP-4194A 1V (25℃±2℃)
4	TEMPERATURE RISE	AT RATED CURRENT	55℃ MAX			
5	DC RESISTANCE	START-FINISH	225.0 mΩ MAX			HIOKI 3540 (25℃±2℃)
6	WITHSTANDING VOLTAGE	LINE TO LINE	AC 1,500V 1 MINUTE.			TOS-5101 CUT OFF CURRENT (5mA)



## 2. OPERATING TEMPERATURE RANGE

-25℃ TO +105℃ INCLUDING TEMPERATURE RISE.

## 3. KEEP TEMPERATURE RANGE

-10℃ ~ +60℃.

## 4. CIRCUIT DIAGRAM

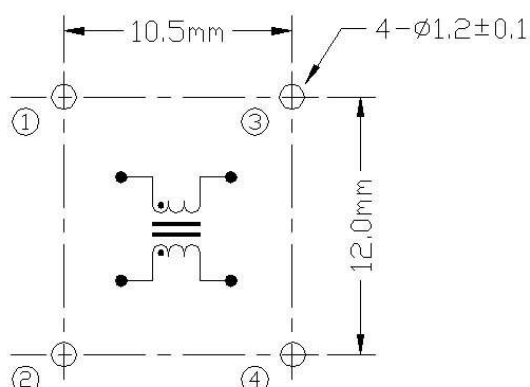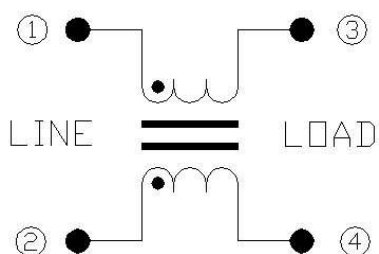

Minimum PCB Piercing HOLE

#125 , WOLMUN-RI, PALTAN-MYEON,  
HWASEONG-SI, KYUNGGI-DO, KOREA 445-914  
TEL : 82+(0)313543160  
FAX : 82+(0)313543156

**TNC**  
**TNC Co.,LTD**

PAGE

3/12


※ This document is a temporary specification which does not include whole information about the product.  
 ※ This document is subject to be changed for approving product quality without notice.

SPECIFICATIONS	ITEM	LINE FILTER	Rev
	TNC SPEC NO	CH008090S	0

## 5. WINDING SPECIFICATION

NO	TERMINAL		WIRE	TURNS	WINDING METHOD	UNBALANCE SPECIFICATION
	START	FINISH				
L1	1	3	UEW 0.3Φ	47 ±2Ts	HANDMADE	BETWEEN L1 AND L2 (0.4mH MAX)
L2	2	4				

## 6. SHAPE AND DIMENSION

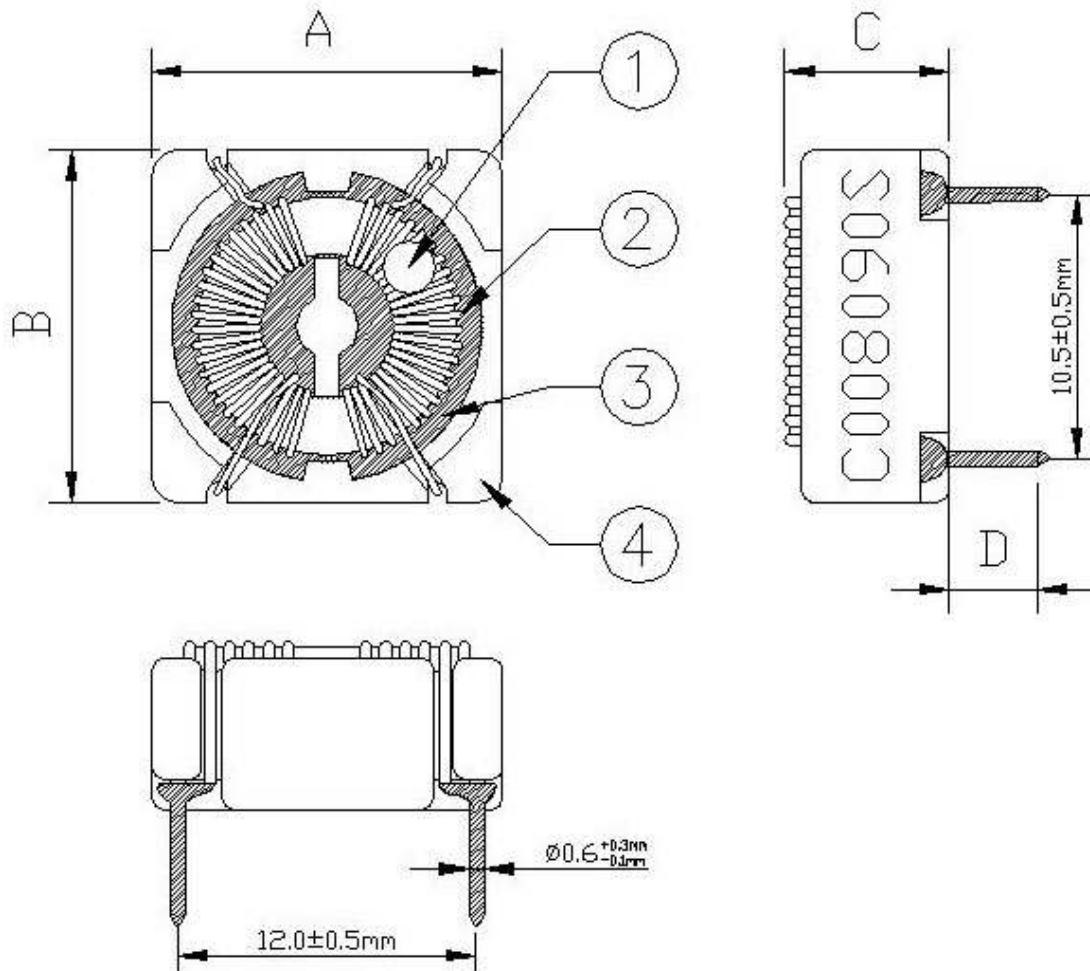

DIMENSION	A	B	C	D
	15.0mm MAX	15.0mm MAX	8.0mm MAX	4.0 ± 1.0mm

#125 , WOLMUN-RI, PALTAN-MYEON,  
 HWASEONG-SI, KYUNGGI-DO, KOREA 445-914  
 TEL : 82+(0)313543160  
 FAX : 82+(0)313543156

**TNC**  
**TNC Co.,LTD**

PAGE

4/12